



LAVITTO

EVERYDAY NATURE

Thoughtful details. Lasting
quality. Flooring for every home.

HYBRID COLLECTION

Three choices. Find your everyday fit.

The LAVITTO Hybrid Collection offers three thicknesses: 6.5mm, 8mm and 10mm.



ESSENTIAL SERIES

The Everyday Choice
6.5mm Balanced construction

PIONEER SERIES

The Dependable Choice
8mm Stable construction

PINNACLE SERIES

The Flagship Choice
10mm Thick-board construction



THREE CHOICES. FIND YOUR OWN STYLE.

The LAVITTO Hybrid Collection offers three choices: ESSENTIAL, PIONEER and PINNACLE. Each has its own thickness, plank dimensions and surface finish, with the same care for everyday living. From easy renovations to flagship quality, there is a floor to suit your way of life.



ESSENTIAL SERIES

The Everyday Choice

Balanced 6.5mm construction, 230mm wide planks and an embossed-in-register (EIR) woodgrain finish combine everyday protection with a fresh look.



PIONEER SERIES

The Dependable Choice

A Rigid Core, Unilin locking system and correct installation work together to provide dependable support for everyday living.




PINNACLE SERIES

The Flagship Choice

A micro-foamed Hybrid core, wide matt planks and Pressed Bevel edges bring flagship quality underfoot and into every detail.

COMPARE THE LAYERS AT A GLANCE.

Total thickness → Core → Acoustic underlay

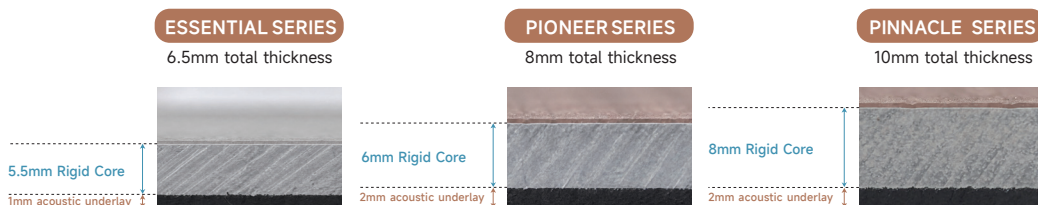

CONFIDENCE IN EVERY COLLECTION, FROM SURFACE TO CORE.

Seven features are shared across ESSENTIAL, PIONEER and PINNACLE, with no compromise between thicknesses.



Deep-seal waterproof system

Bring the beauty of woodgrain into kitchens and laundry areas with confidence.

The deep-seal construction helps the floor handle cooking steam, splashes and everyday moisture, keeping your home's style consistent from the living room to the open-plan kitchen.



High-density wear layer

Made to stay looking good through playtime and busy paws.

Toy cars, moving dining chairs and running pets are part of life. The wear-resistant surface is built for frequent use, so your home can keep up with a lively household.



acoustic construction

Softer footsteps. Greater comfort.

The integrated acoustic layer cushions each step and reduces the transmission of footstep noise. From early starts and children at play to late arrivals home, enjoy less disturbance and more ease.



Flame-retardant protection

Quiet protection for added peace of mind.

The surface layer offers flame-retardant performance, adding discreet protection and peace of mind to everyday living.



FloorScore certified for peace of mind

Less waiting. More time to enjoy your home.

A FloorScore-certified choice gives you one less thing to worry about when refreshing your home, leaving more time for living.



Unilin quick-fit locking system

Renovate with less disruption to everyday life.

The Unilin locking system provides secure joints and straightforward installation, with individual planks easy to replace when needed.



Embossed in register (EIR)

The look of woodgrain, with the texture to match.

The surface texture follows the woodgrain, revealing finer detail beneath your fingertips and bare feet.

HYBRID 6.5MM - ESSENTIAL SERIES

The Everyday Choice

Make room for renovation, with comfort built in.

ESSENTIAL's balanced construction brings renovation practicality and everyday comfort together. Suited to existing homes and spaces with limited floor-to-ceiling height, it combines straightforward installation with wear resistance, acoustic comfort and the beauty of woodgrain.

6.5mm total thickness	5.5mm Hybrid Rigid Core	1mm acoustic underlay	1520 1520 × 230mm	MATT embossed in register (EIR)
				
				
Underfoot comfort	Visual appeal	Texture in Touch		
A 5.5mm Hybrid Rigid Core with 1mm acoustic underlay softens each step and reduces echoes.	Planks measuring 230mm wide and 1520mm long create fewer joints and flowing lines for a more spacious look.	Embossed-in-register (EIR) texture follows the visible woodgrain, bringing the pattern to life beneath your fingertips.		

AVAILABLE COLOURS



Suitable settings: Home renovations · Spaces with limited floor-to-ceiling height · Open-plan living and dining
Colours may vary in print and on screen. Please refer to physical samples.

HYBRID 8MM-PIONEER SERIES

The Dependable Choice

Comfort, stability and practicality, in perfect balance.

A considered balance of underfoot comfort, acoustic performance, stability and everyday durability for those seeking a quality home upgrade.

8mm
total thickness

6mm
Hybrid Rigid Core

2mm
acoustic underlay

1520
1520 × 183mm

MATT
embossed in register (EIR)



Solid construction for everyday support

A 6mm Hybrid Rigid Core gives this collection its firm, stable feel underfoot. The 2mm acoustic underlay helps reduce footstep noise, a welcome difference in busy households where people come and go at different times.



Woodgrain that gives your space lasting appeal

The 183mm plank width creates a refined laying pattern. In living rooms, studies and hallways, the direction of the joints helps define the space. The 1520mm plank length reduces end joints for a more open, generous feel.



Detail you can feel

Embossed-in-register (EIR) texture follows the visible woodgrain, adding depth you can feel. The matt surface minimises glare, while Micro Bevel edges subtly define each plank for a more layered look once installed.


AVAILABLE COLOURS



Arctic Oak



Stonewash Oak

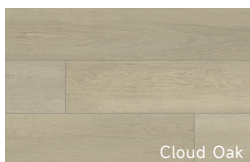


Cloud Oak



Almond Oak




Sand Oak

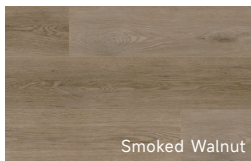

Smoked Walnut



Pure Blackbutt



Warm Spotted Gum

Suitable settings: Everyday home use · Studies and hallways · Moderate-traffic commercial spaces
Colours may vary in print and on screen. Please refer to physical samples.

HYBRID 10MM-PINNACLE SERIES

The Flagship Choice

Feel the depth of comfort with every step.

PINNACLE is the thickest of the three collections. Its 8mm micro-foamed Hybrid core and 2mm acoustic underlay bring quieter comfort to time spent cooking, children playing on the floor and barefoot moments. Wide 1524 × 228mm planks, matt woodgrain and Pressed Bevel edges carry thoughtful design into every detail underfoot.

10mm total thickness	8mm micro-foamed Hybrid core	2mm acoustic underlay	1524 1524 × 228mm	MATT woodgrain / Pressed Bevel
-------------------------	---------------------------------	--------------------------	----------------------	-----------------------------------





Thickness

An 8mm micro-foamed Hybrid core and 2mm acoustic underlay combine a substantial underfoot feel with sound absorption and responsive cushioning.



Plank dimensions

Wide 1524 × 228mm planks create fewer joints for a more continuous, spacious look.



Surface

Matt woodgrain and Pressed Bevel edges soften reflections and subtly define each plank, revealing depth up close.

AVAILABLE COLOURS




Suitable settings: Spacious single-level apartments · Boutique retail · Cafés and offices
Colours may vary in print and on screen. Please refer to physical samples.

SPECIFICATIONS AND ACCESSORIES

SPECIFICATION	ESSENTIAL SERIES The Everyday Choice	PIONEER SERIES The Dependable Choice	PINNACLE SERIES The Flagship Choice
Total thickness	6.5mm	8mm	10mm
Core	5.5mm Hybrid Rigid Core	6mm Hybrid Rigid Core	8mm micro-foamed Hybrid core
Acoustic underlay	1mm	2mm	2mm
Length × width	1520 × 230mm	1520 × 183mm	1524 × 228mm
Wear layer	0.5mm	0.5mm	0.5mm
Surface	Matt / embossed in register (EIR)	Matt / embossed in register (EIR)	Matt woodgrain
Bevel	Micro Bevel	Micro Bevel	Pressed Bevel
Locking system	Unilin	Unilin	Unilin
Per pack / coverage	6pcs / 2.1sqm	6pcs / 1.67sqm	5pcs / 1.74sqm
Installation method	Floating	Floating	Floating

COLOUR-MATCHED ACCESSORIES FOR A COMPLETE FINISH.

Doorways, wall edges and stair openings — it is often these finishing details that make all the difference.




T-Mould

Transitions at doorways and between floors of the same height

2400×45×8mm

20 lengths per pack / Solid core




Scotia

Finishing along walls and existing skirting boards

2400×28×15mm

25 lengths per pack / Solid core



Square-edge stair nosing

Finishing the front edge of stair treads

1500 × 115 × 36mm

6 lengths / pack / solid core

Colour-matched accessories are available for each collection. Dimensions refer to the external profile. Confirm colour, compatibility and installation method against the actual product and project requirements.

Installation and care: three key points

- 01** Before installation: Ensure the subfloor is level, dry and clean. Leave an 8–10mm expansion gap around the perimeter. A transition profile is recommended for continuous runs longer than 8m.
- 02** Everyday cleaning: Use a slightly damp mop and avoid prolonged standing water. Repeated treatment with strongly acidic, strongly alkaline or wax-based products is not recommended.
- 03** Everyday use: Fit soft pads to furniture feet and lift furniture when moving it. Use a dust-trapping entrance mat. If a sharp or heavy object falls, remove it promptly and check the affected area.

CERTIFICATIONS & TEST RESULTS

DESCRIPTION	STANDARD	SYMBOL REQUIREMENTS		RESULTS
CE Certification	EN14041	CE	Refer to Standard	Passes Requirements
VOC	FloorScore	FloorScore	—	Passes Requirements
Formaldehyde	FloorScore	FloorScore	Refer to Standard	Passes Requirements
Reaction To Fire Test	AS ISO 9239:1 equivalent to: ISO 9239 1:2002 GB/T11785	Class:B1(B-S1)	—	Critical Heat Flux(CHF)(kW/m ²):≥11 Smoke(%×min):329 Class: B1(B-S1)
REACH	Ortho-phalates	Ortho Phthalates Free	—	Not Detected
REACH	Lead/Metals	N/A	—	Not Detected
REACH	Benzene/Xylene	N/A	—	Not Detected
REACH	Tributyltin	N/A	—	Not Detected
REACH	PCP (pentachlorophenol)	N/A	—	Not Detected
Dimensional Stability after Exposure to Hert	ISO 23999:2025	N/A	≤0.25%	Passes Requirements
Curling	ISO 23999:2025	N/A	≤2mm	Passes Requirements
Castor Chair Test	ISO 4918:2016	N/A	No visible damage	Passes Requirements
Colour Fastness to Light	ISO 10582:2017	N/A	Grade(B.W.S):Better than 6	Passes Requirements
Openings	ISO 10582:2017 Annex C	N/A	Ave:≤0.15mm Individual values:≤0.20mm	Passes Requirements
Height Difference	ISO 10582:2017 Annex C	N/A	Ave:≤0.10mm Individual values:≤0.15mm	Passes Requirements
Locking Strength	ISO 10582:2017 Annex D	N/A	Only for Commercial use: Class 31,32,33 ≥1.5 kN/m; Class 34 ≥2.0 kN/m	Passes Requirements
Classification	ISO 10874:2009	Commercial use symbol	—	Passes Requirements
Effect of Simulated Movement of a Furniture Leg	ISO 16581:2014	N/A	No visible damage	Passes Requirements
Micro-Scratch Resistance	EN 16094:2021	N/A	—	Procedure A: MSR-A2 Procedure B: MSR-B1
Stain And Resistance To Chemical	ISO 26987:2008	N/A	Index: 0: Not affected 1: Slight 2: Moderate 3: Severe	Index:0
Shod Ramp Test	DIN EN 16165: 2023-02 Annex B	N/A	—	Ramp test value oshod: 14° Slip Resistance Class: R10
Wet Pendulum Test	AS 4586-2013 Amdt 1-2017 Appendix A	N/A	Refer to Standard	SRV"wet":.42 Class: P3



The LAVITTO Hybrid Collection offers three thicknesses: 6.5mm, 8mm and 10mm. From easy home renovations to the substantial feel of our flagship flooring, thoughtful details bring everyday quality underfoot and within reach.



PHONE:
(02) 7822 0118



EMAIL:
info@lavitto.com.au



WEBSITE:
www.lavitto.com.au